




FIG. 21
STEEL C-CLAMP

FIG. 21L
STEEL C-CLAMP WITH LOCKNUT, DOMESTIC

FIG. 21LI
STEEL C-CLAMP WITH LOCKNUT



Manufactured in the USA
Excluding 21LI

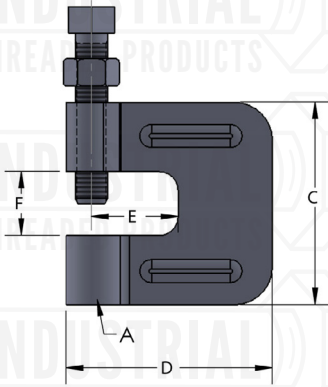

Material/Finish: Carbon steel 304 stainless steel 316 stainless steel
Plain electro-galvanized

Service: Designed for attaching hanger rod to the bottom flange of a beam. Features the ribbed design for added strength. Hardened steel cup point set screw secures clamp to beam.

Approvals: U.L.-U.L.C. listed sizes $\frac{3}{8}$ AND $\frac{1}{2}$ ($\frac{1}{2}$ FOR 4" IPS max) **with locknut only.** FM approved for $\frac{3}{8}$ only **with and without locknut.** Complies with Federal Specification WW-H-171-E (Type# 23), A-A-1192 A (Type# 23) and Manufacturers' Standard Society SP-58 and MSS SP-69 (Type# 23).

Ordering: Specify rod size, figure number and finish.

Notes: See MSS SP-69 for proper set screw torque recommendations.

SIZE A	SET SCREW	C	D	E	F	MAX PIPE SIZE	WEIGHT EACH (lbs)		MAX REC LOAD (lbs)
							21 (W/OUT NUT)	21L (W/NUT)	
$\frac{3}{8}$ -16	$\frac{3}{8}$ -16	$2\frac{3}{8}$	$2\frac{3}{8}$	1	$\frac{3}{4}$	4	.38	.40	400
$\frac{1}{2}$ -13	$\frac{3}{8}$ -16	$2\frac{3}{8}$	$2\frac{3}{8}$	1	$\frac{3}{4}$	4	.38	.40	500
$\frac{5}{8}$ -11	$\frac{1}{2}$ -13	$2\frac{3}{8}$	$2\frac{5}{16}$	$\frac{7}{8}$	$\frac{3}{4}$	5	.56	.60	550
$\frac{3}{4}$ -10	$\frac{5}{8}$ -11	$2\frac{3}{8}$	$2\frac{5}{16}$	$\frac{7}{8}$	$\frac{3}{4}$	6	.60	.68	630
$\frac{7}{8}$ -9	$\frac{3}{4}$ -10	3	$3\frac{5}{16}$	$1\frac{1}{4}$	1	8	1.76	1.88	1200

Project Information		Approval Stamp
Project:		Notes:
Address:	Contractor:	
Date:	Engineer:	
Approved <input type="checkbox"/>	Approved as Noted <input type="checkbox"/>	Not Approved <input type="checkbox"/>