


**FIG. 218**  
**MALLEABLE IRON CENTER LOAD BEAM CLAMP**

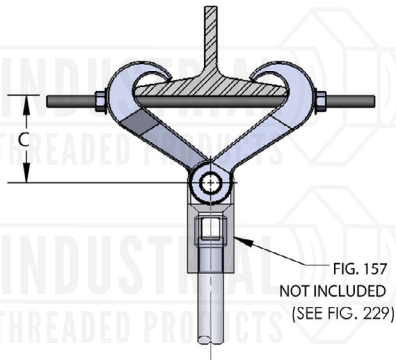

**Material:** Malleable iron.

**Finish:** Plain or electro-galvanized.

**Service:** Designed for the suspension of a hanger rod from the center of an I-beam. The clamp accommodates flange widths of 2 3/8" - 7". Flange thickness not to exceed .60 inches. Normally used in conjunction with figure 157 extension piece. Figure 157 provides 1" of vertical adjustment.

**Approvals:** When used with FIG. 157 Extension Piece, complies with Federal Specification WW-H-171-E (Type# 30), A-A-1192 A (Type# 30) and Manufacturers' Standardization Society MSS SP-58 and SP-69 (Type# 30).

**Ordering:** Specify figure number and finish.

**Notes:** For complete assembly with extension piece see FIG. 229.

A (7/8 MAX ROD)	C ROD TAKE OUT FOR WIDTH OF BEAM FLANGE						BOLT DIA	WEIGHT EACH (lbs)	MAX REC LOAD (lbs)
	2 3/8	3	4	5	6	7			
CLAMP ONLY	3 1/2	3 7/16	3 5/16	2 15/16	2 9/16	1 7/8	7/16	2.49	1365

Project Information		Approval Stamp
Project:		Notes:
Address:	Contractor:	
Date:	Engineer:	
Approved <input type="checkbox"/> Approved as Noted <input type="checkbox"/> Not Approved <input type="checkbox"/>		