




**FIG. 310NF**  
**"EM-LOK" ADJUSTABLE**  
**SWIVEL RING HANGER, NFPA**



Manufactured in the USA

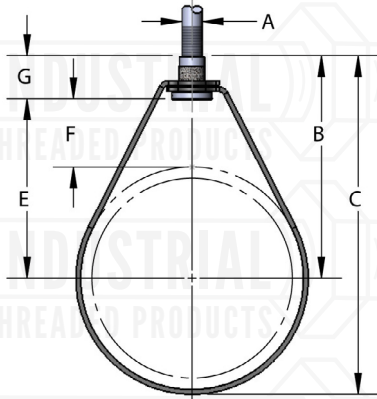

**Material:** Pre-galvanized carbon steel, also available in 304 and 316 sst  
**Finish:** Pre-galvanized.  
**Service:** Designed for the suspension of non-insulated stationary pipe lines. Typically used as a pipe support for sprinkler piping. Hanger is manufactured to use minimum rod sizes permitted by NFPA.  
**Approvals:** U.L. - U.L.C. listed and FM approved (3/4"-8"). Complies with Federal Specification WW-H-171-E (Type# 10), A-A-1192A (Type# 10) and Manufacturers' Standardization Society MSS SP-58 and SP-69 (Type# 10).  
**Ordering:** Specify pipe size and figure number.

PIPE SIZE	PIPE OD	MATERIAL SIZE	A	B	C	E	F	G	WGT EACH (lbs)	MAX REC LOAD (lbs)
1/2	0.840	18ga x 5/8	3/8	2 1/2	2 7/8	1 5/8	13/16	7/8	0.08	400
3/4	1.050			2 7/16	2 15/16	1 9/16	11/16		0.08	
1	1.315			2 5/8	3 1/4	1 3/4	11/16		0.08	
1 1/4	1.660			2 9/16	3 3/8	1 11/16	7/8		0.10	600
1 1/2	1.900			2 11/16	3 5/8	1 13/16	7/8		0.10	
2	2.375			3 3/8	4 1/2	2 1/2	15/16		0.12	
2 1/2	2.875	14ga x 3/4	3/8	3 7/8	5 3/8	3 1/8	1 3/8	11/16	0.24	1000
3	3.500			4 1/2	6 1/4	3 5/8	1 5/8		0.28	
3 1/2	4.000			4 7/8	6 7/8	4	13/4		0.32	
4	4.500			5	7 1/4	4 1/8	1 5/8		0.32	
5	5.563	13ga x 3/4	1/2	5 3/4	8 1/2	4 1/4	1 7/8	11/16	0.62	1250
6	6.625	12ga x 3/4		6 3/4	10 1/8	5 1/8	21/8		0.65	
8	8.625	11ga x 1		7 7/8	12 1/4	7	2 3/8		1.00	
10	10.750	11ga x 1 1/4		9 11/16	15 1/16	8 5/8	31/4		1.675	

Project Information		Approval Stamp
Project:		Notes:
Address:	Contractor:	
Date:	Engineer:	
Approved <input type="checkbox"/>	Approved as Noted <input type="checkbox"/>	Not Approved <input type="checkbox"/>