
FIG. 4000 SERIES PIPE SLIDE TEE



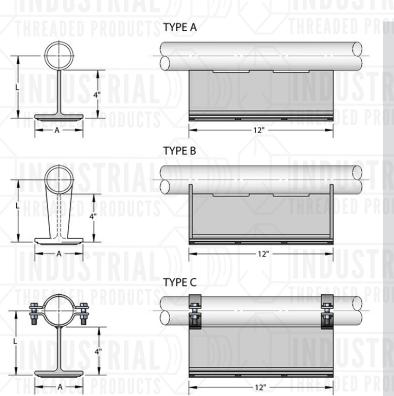

Material: Carbon steel tee with or without PTFE slide pad, also available in 304 and 316

stainless steel.

Finish: Plain, galvanized or painted.

Service: Designed for the support of pipe where horizontal movement

may occur due to expansion and contraction and a low coefficient of friction is required. May

be welded or clamped to pipe.

Approvals: Complies with Federal Specification

A-A-1192A (Type# 35) and

Manufacturers' Standardization Society

MSS SP 58 and SP 69 (Type# 35).

Ordering: Specify pipe size, figure number, type,

finish and pipe clamp figure number. Order slide base (Fig. 4100) if required.

Notes: Designed to minimize heat loss through tee. Tee without PTFE to

be used as a pipe anchor only. No

lubrication required.

PIPE SIZE	Α	NUUDI
2	4	5 <sup>3</sup> /16
2 1/2		5 <sup>7</sup> /16
3		5 <sup>3</sup> / <sub>4</sub>
4		6 <sup>1</sup> / <sub>4</sub>
5		6 13/16
6		7 <sup>5</sup> /16
8		8 <sup>5</sup> /16
10		93/8
12		10 <sup>3</sup> /8
14		11
16		12
18	7	13
20		14
24		16

IIIIMIIIAWALIII PI	oject Information	Approval Stamp
Project:		Notes:
Address:	Contractor:	THREADED PRODUCTS
Date:	Engineer:	
Approved Approved as Noted Not Approved		IMPLICATION