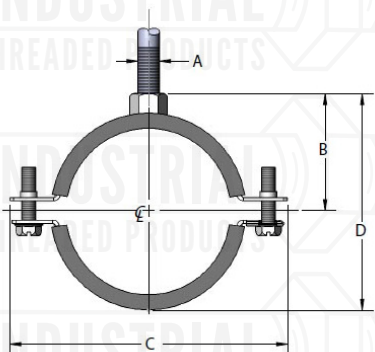


FIG. 40HS
"HANDY SPLIT" RING HANGER


- Material:** Electro-Galvanized carbon steel with EPDM rubber insulation liner (EPDM rubber liner is UV resistant).
- Service:** Designed for the suspension of non-insulated stationary pipe liners horizontally or vertically.
- Temperature Range:** -50F to +230F
- Approvals:** Complies with Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type# 12).
- Benefits:**
- EPDM Rubber Liner minimizes noise.
 - "Handy Split" hinge mechanism allows installation with one hand.
 - $\frac{3}{8}$ " welded cap nut allows easy attachment to threaded rod.
 - Many sizes accommodate both OD and IPS sizes.

PIPE SIZE (IPS)	COPPERTUBE SIZE (CTS)
$\frac{1}{4}$ "	$\frac{3}{8}$ "
$\frac{3}{8}$ "	$\frac{1}{2}$ "
$\frac{1}{2}$ "	$\frac{5}{8}$ "
$\frac{3}{4}$ "	$\frac{3}{4}$ "
1"	1"
1 $\frac{1}{4}$ "	1 $\frac{1}{4}$ "
1 $\frac{1}{2}$ "	1 $\frac{1}{2}$ "
2"	2"
2 $\frac{1}{2}$ "	2 $\frac{1}{2}$ "
3"	3"
3 $\frac{1}{2}$ "	3 $\frac{1}{2}$ "
4"	4"

Project Information		Approval Stamp
Project:		Notes:
Address:	Contractor:	
Date:	Engineer:	
Approved <input type="checkbox"/> Approved as Noted <input type="checkbox"/> Not Approved <input type="checkbox"/>		