


FIG. 429KT
ADJUSTABLE PIPE SADDLE SUPPORT, with U-BOLT, KIT

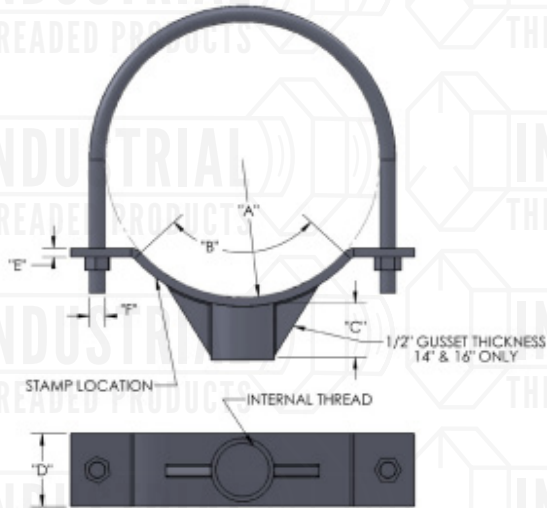

Material: Ductile iron saddle with carbon steel coupling, carbon steel nipple and base plate, carbon steel U-Bolts and nuts, cast steel reducing coupling, stainless steel set screws.

Finish: All items listed above are hot-dip galvanized except for stainless steel set screws

Service: Designed to support pipe horizontally. Straight cut pipe thread on nipple provides up to 4 - 1/2 inches of vertical adjustability.

Ordering: Specify pipe size and figure number.

Notes: Saddles accommodate ductile iron pipe and IPS. Support requires 2" schedule 40 extension pipe to be cut in the field.

*NOTE: Min. Distance of Floor to B.O.P. = 9.125"

Also available in 316 stainless steel.
 Factory System Tested to 11,000 Lbs
 (Support Must Be Properly Aligned to Piping System)

Size	A	B	C	D	E	F	Thread Size
3	2.030	130°	1.500	2.000	0.375	1/2-3	1-1/4-7
4	2.450	130°	1.500	2.000	0.375	1/2-3	1-1/4-7
6	3.500	130°	1.500	2.000	0.500	5/8-11	1-1/4-7
8	4.580	130°	1.500	2.000	0.500	5/8-11	1-1/4-7
10	5.600	130°	1.500	2.000	0.500	5/8-11	1-1/4-7
12	6.650	130°	1.500	2.000	0.500	5/8-11	1-1/4-7
14	7.750	130°	3.000	3.000	0.500	7/8-9	2-1/2-4
16	8.800	130°	3.000	4.000	0.500	7/8-9	2-1/2-4

