



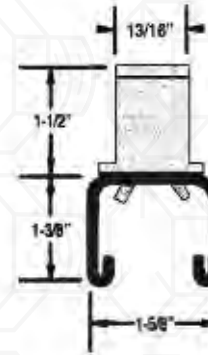

7225

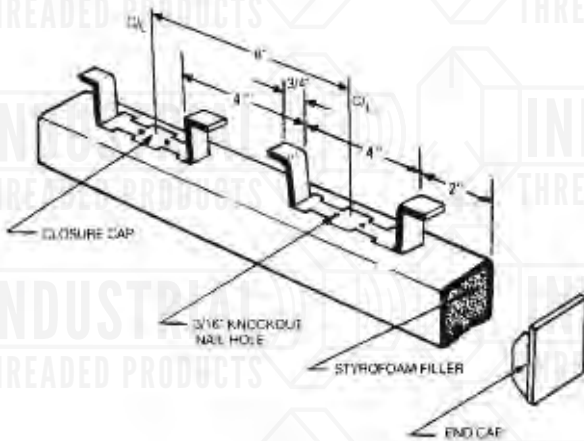

1-3/8" x 1-5/8"

12 GAUGE CONTINUOUS CONCRETE INSERT

I.T.P. Part#	Finish	Standard Length
7225	Plain Pre-Galvanized	10' or 20' Other lengths available

FEATURES:

- Loading data was calculated in a concrete mixture which was proportioned so that the compression strength of the concrete was 2,500 to 3,000 pounds per square inch and that the load is dependent on the surrounding concrete.
- Tests were performed with a safety factor of 3, and in accordance with the MFMA Specifications.
- Concrete inserts are supplied with an end cap and either a styrofoam filler or plastic strip installed in the insert channel to prevent concrete seepage.
- Inserts should be secured to forms at 16" intervals.
- When ordering, please indicate finish and either foam filler, or plastic closure.

I.T.P. FIGURE NUMBER	Length/ Inch	Weight C. Pcs.	Max. Allowable Load Per Section
7225	3	87	500
7225	4	103	800
7225	6	134	1000
7225	8	206	1200
7225	12	188	2000
7225	18	282	2000
7225	24	376	2000
7225	30	470	2000
7225	36	564	2000
7225	48	752	2000
7225	60	940	2000
7225	72	1128	2000
7225	84	1316	2000
7225	96	1504	2000
7225	108	1692	2000
7225	120	1880	2000
7225	240	3760	2000