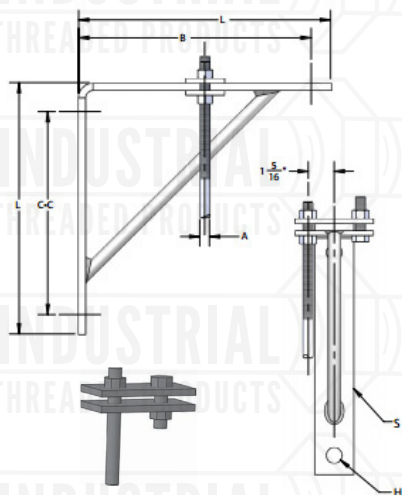


**FIG. 820 & 820C**  
**LIGHT WELDED STEEL BRACKET & CLIP**

**Material/Finish:** Carbon steel ☐ 304 stainless steel ☐ 316 stainless steel ☐

 Plain ☐ electro-galvanized ☐

 hot-dip galvanized ☐ painted ☐
**Service:** Recommended for the suspension of hanger rod for support of light loads up to 750 lbs. Rod can be suspended at any point along the length of the bracket, thus providing horizontal adjustment, using figure #820C clip which consists of two steel plates joined by a bolt and nut in one end.

**Approvals:** Fig. 820 complies with Federal Specification WW-H-171-E (Type# 32), A-A-1192A (Type# 31) and Manufacturers' Standardization Society MSS SP 58 and SP 69 (Type# 31).

**Ordering:** Specify size number, figure number and finish.

**Notes:** Piping suspended from FIG. 820C clip shall not exceed 3 1/2" in diameter. Side clip (FIG. 820C) to be ordered separately.

FIG. 820

BRACKET SIZE	B	C-C	HOLES H	L	STOCK SIZE S	WGT EACH (lbs)
1	8	6 1/2	13/16	9	2 X 3/8	4.20
2	12	10 1/2	13/16	13		6.50
3	18	16 1/2	13/16	19		9.40

FIG. 820C

CLIP NUMBER	PIPE SIZE	ROD SIZE A	WGT EACH (lbs)
1	3/4 to 2	3/8	0.80
2	2 1/2 to 3 1/2	1/2	1.24

Project Information		Approval Stamp
Project:		Notes:
Address:	Contractor:	
Date:	Engineer:	
Approved <input type="checkbox"/> Approved as Noted <input type="checkbox"/> Not Approved <input type="checkbox"/>		