




**BASE WITH TWO 1/2" (12.7MM) –
13 ELECTRO ZINC ALL THREADED ROD RISERS
AND 14 GA. (1.9MM) GALV. SLOTTED CHANNEL**

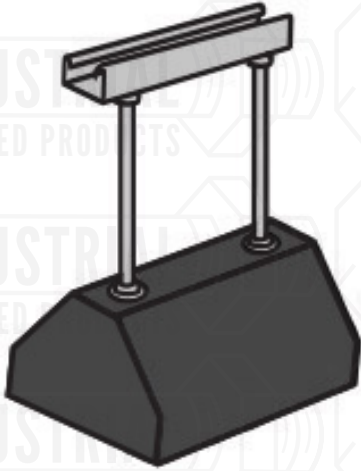

Dimensions:

Overall Height as Specified Base –
4" High (101mm) x 6" (152mm) Wide
x 9.6" (244mm) Length (base length)

Ordering:

Specify figure number and model number.

Ultimate Load Capacity

200 lbs. (0.89kN) For roof loading, consult
roof manufacturer or engineer. As with
most commercial roofs, the weakest point
may be the insulation board beneath the
rubber membrane.

UPC/Part #	Model #	Adjustable Height / in (mm)	Width / in (mm)	Channel Length	Weight Each	Ultimate Load Capacity
782051/50036	DBE 10 – 8	5-1/2 – 8 (140 – 203)	6 (152)	9.35" (152mm)	5.68 (2.58kg)	200 lbs. (0.89kN)
782051/50037	DBE 10 – 12	5-1/2 – 12 (140 – 305)	6 (152)	9.35" (152mm)	5.72 (2.59kg)	200 lbs. (0.89kN)
782051/50038	DBE 10 – 16	5-1/2 – 16 (140 – 406)	6 (152)	9.35" (152mm)	5.76 (2.61kg)	200 lbs. (0.89kN)