




**FIG. PSC
PIPE LINK SEAL FOR CAST IRON SOIL PIPE (EXTRA HEAVY)**

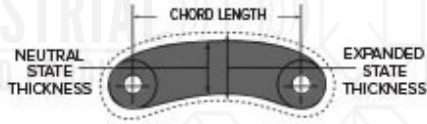

Service:

Designed to provide a gas and water tight seal. All sizes have been tested to withstand a hydro-static seal up to 20 psig or 40 feet of head pressure in addition to withstanding temperatures up to 250 degrees Fahrenheit.

Notes:

Minimum Recommended sleeve length or wall thickness is 4 inches for pipe link seal model PS-325 and 6 inches for models PS-400 and larger.

Pipe Size (in)	Pipe OD (in)	Steel Pipe Sleeve				PVC Pipe Sleeve			Cast of Core Bit Drilled Hole		
		Pipe Size	Sleeve ID	Seal Part #	required # of links	Sleeve ID	Seal Part #	required # of links	Hole ID	Seal Part #	required # of links
2	2.380	4	4.026	PS-300	6	4.070	PS-300	7	4	PS-300	6
3	3.500	5	5.047	PS-300	8	6.000	PS-425	4	5	PS-300	8
4	4.500	6	6.065	PS-300	10	7.803	PS-475	7	6	PS-300	10
5	5.500	8	7.981	PS-425	6	9.728	PS-575	8	8	PS-425	6
6	6.500	10	10.020	PS-475	10	9.728	PS-400	7	10	PS-475	10
8	8.620	12	12.000	PS-475	12	11.538	PS-400	9	12	PS-475	12
10	10.750	14	13.250	PS-425	10	—	—	—	—	PS-400	10
12	12.750	16	15.250	PS-425	12	—	—	—	—	PS-400	12
15	15.880	20	19.250	PS-400	15	—	—	—	—	PS-575	18