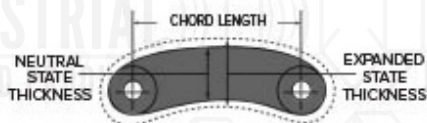


**FIG. PSCT
PIPE LINK SEAL**
**Service:**

Designed to provide a gas and water tight seal. All sizes have been tested to withstand a hydro-static seal up to 20 psig or 40 feet of head pressure in addition to withstanding temperatures up to 250 degrees Fahrenheit.

Notes:

Minimum Recommended sleeve length or wall thickness is 4 inches for pipe link seal model PS-325 and 6 inches for models PS-400 and larger.

Pipe Size (in)	Pipe OD (in)	Steel Pipe Sleeve				PVC Pipe Sleeve			Cast of Core Bit Drilled Hole		
		Pipe Size	Sleeve ID	Seal Part #	required # of links	Sleeve ID	Seal Part #	required # of links	Hole ID	Seal Part #	required # of links
1/2	0.625	2	2.067	PS-275	4	2.150	PS-300	3	2	PS-275	4
3/4	0.875	2	2.067	PS-200	4	2.600	PS-315	4	2	PS-200	4
1	1.125	2-1/2	2.469	PS-275	5	2.600	PS-275	5	2-1/2	PS-275	5
1-1/4	1.375	3	3.068	PS-300	4	3.166	PS-315	5	3	PS-300	4
1-1/2	1.625	3	3.068	PS-275	7	3.166	PS-300	5	3	PS-275	7
2	2.125	3-1/2	3.548	PS-275	8	4.070	PS-315	7	3-1/2	PS-275	8
2-1/2	2.625	4	4.026	PS-275	10	4.070	PS-275	12	4	PS-275	10
3	3.125	5	5.047	PS-325	4	6.000	PS-400	4	5	PS-325	4
4	4.125	6	6.065	PS-325	5	6.000	PS-315	11	6	PS-325	5
6	6.125	8	7.981	PS-325	7	9.728	PS-475	9	8	PS-325	7
8	8.125	10	10.020	PS-325	9	11.538	PS-475	12	10	PS-325	9
10	10.125	14	12.000	PS-400	10	—	—	—	14	PS-400	14
12	12.125	16	15.250	PS-400	12	—	—	—	16	PS-400	16