




FIG. 23L
MALLEABLE IRON C-CLAMP WITH LOCKNUT

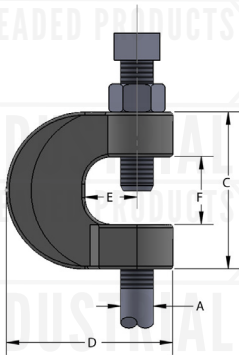

Material: Malleable iron
Finish: Plain, electro-galvanized.
Service: Designed for attaching hanger rod to the bottom flange of a beam.
Approvals: U.L.-U.L.C. listed and FM approved (3/8" and 1/2" ONLY). Complies with Federal Specification WW-H-171-E (Type# 23), A-A-1192A (Type# 23) and Manufacturers' Standardization Society MSS SP-58 and SP-69 (Type# 23).
Ordering: Specify rod size, figure number and finish.
Notes: See MSS SP-69 for proper set screw torque recommendations.

SIZE A	SET SCREW	C	D	E	F	MAX PIPE SIZE	WEIGHT EACH (lbs)	MAX REC LOAD (lbs)
3/8-16	3/8-16	1 3/4	1 3/4	5/8	3/4	4	0.40	400
1/2-13	3/8-16	1 3/4	1 3/4	5/8	3/4	4	0.39	500
5/8-11	3/8-16	2	2	5/8	3/4	5	0.65	550
3/4-10	3/8-16	2	2	5/8	3/4	6	0.76	630

Project Information		Approval Stamp
Project:		Notes:
Address:	Contractor:	
Date:	Engineer:	
Approved <input type="checkbox"/>	Approved as Noted <input type="checkbox"/>	Not Approved <input type="checkbox"/>