





**FIG. 600
SOCKET CLAMP**

FIG. 599 WASHER
ORDER SEPARATELY

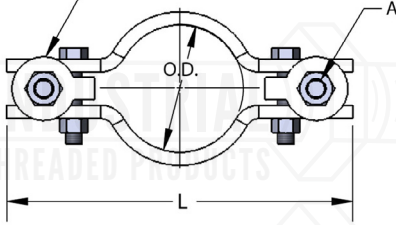

Typical
Installation



Manufactured
in the USA

Material/Finish: Carbon steel 304 stainless steel 316 stainless steel
 Plain electro-galvanized

Service: Designed to be used to clamp joints of underground AWWA ductile iron water lines to prevent joint separation due to excessive water pressure.

Ordering: Specify size, figure number and finish.

PIPE SIZE	PIPE OD	MATERIAL SIZE	BOLT	A ROD DIA.	C	L	WGT EACH (lbs)
3	3.960	2 X 3/8	5/8	3/4		12	5.95
4	4.800	2 X 1/2	5/8	3/4		12 3/4	8.00
6	6.900	2 X 1/2	5/8	3/4		15 1/2	10.00
8	9.050	2 X 1/2	5/8	3/4		17 1/2	12.10
10	11.100	2 X 1/2	5/8	3/4		19 1/2	13.63
12	13.200	2 X 1/2	5/8	3/4		22	15.65
14	15.300	3 X 3/4	7/8	1		28 1/2	45.00
16	17.400	4 X 3/4	1	1 1/8		30 3/4	63.00
18	19.500	4 X 3/4	1 1/4	1 1/4		34 5/8	76.00
20	21.600	5 X 3/4	1 1/4	1 3/8		37 1/2	100.50
24	25.800	5 X 3/4	1 1/2	1 1/2		43	118.00

Project Information		Approval Stamp
Project:		Notes:
Address:	Contractor:	
Date:	Engineer:	
Approved <input type="checkbox"/> Approved as Noted <input type="checkbox"/> Not Approved <input type="checkbox"/>		